


▼ WR5 Hydraulic Wedgie and Spread Cylinders



Capacity:	1.0Ton
Tip Clearance:	12.8mm
Maximum Spread:	94mm
Max. Operating Pressure:	70MPa

- Optimized for confined-space use: Ultra-slim wedge tip fits narrow gaps inaccessible to larger spreaders for flange separation, component lifting and working-clearance creation.
- Safe & easy operation: Single-acting spring-return design. Wedge tip auto-retracts upon pressure release for fast reset, no external operation needed.
- Lightweight & portable: Perfect for overhead, confined-space and remote-site work.
- Durable: Corrosion-resistant materials for harsh working conditions.

▼ WR5 Specifications Sheet

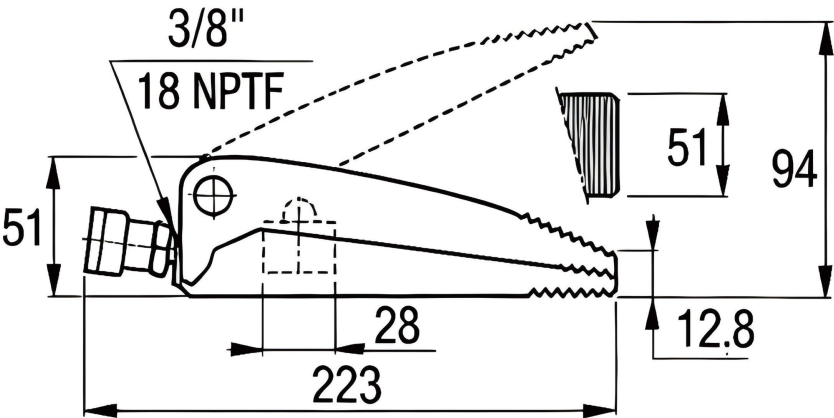

Cylinder Capacity ton (kN)	Tip Clearance (mm)	Model Number	Maximum Spread (mm)	Cylinder Effective Area (cm ²)	Oil Capacity (cm ³)	Weight (kg)
1.0 (8.9)	12.8	WR5	94	6.5	10	2.3



RC-Trio Series Cylinders
10 ton RC-Trio Series cylinders (except RC101) fit into A92 Spreader

Attachment.



Power Box
Tool box with P392 hand pump, pressure gauge and adapter connector assembly, hose and LW16.

Model	Description	Qty.
P392GC	P392GC integrated with GA45GC for visible pressure reading	1
WR5	Hydraulic Vertical Lifting Wedges	1
HSP700PC -2-MM	70MPa high-pressure oil pipe, with PC protective sleeve, 2m long, with CEJN232 male connectors at both ends.	1
Portable hard plastic case		1